

# MOBILITY AID



**GM135-874L**  
Wheel chair  
Aluminum type



**GM135-809**  
Wheel chair  
Steel type



**GM135-909B**  
Wheel chair  
Steel type



**GM135-870ABJ**  
Wheel chair  
Steel type

**MAIN PARAMETERS**

MEASUREMENTS(cm) MODEL NO														
											(Kg)	DIM	NW/GW	
<b>GM135-809-41(-46)</b>	60(65)	24	41(46)	59	20	50	87	106	40	45	100	93x24x88	19/ 21	
<b>GM135-874L-41</b>	63	28	41	57	15	45	82	100	40	45	100	90x28x85	13/ 15	
<b>GM135-909B-41(-46)</b>	56(61)	28	41(46)	60	20	50	94	109	40	45	110	80x28x94	20/ 22	
<b>GM135-870ABJ-41(-46)</b>	61(66)	28	41(46)	40	15	45	90	100	40	45	100	82x28x70	15/ 17	



**Walker**



**GM136-913L**



**GM136-917L**



**GM136-915L**



**GM136-912L**



**GM136-914L**

**MAIN PARAMETERS**

MODEL Number	LENGTH (cm)	WIDTH (cm)	HEIGHT (cm)	N.W. (Kg)	DIM (Cm)	PCS CN	G.W. (Kg)
GM136-912L	57	60	74.5-92	2.6	58x18x81	2	7
GM136-913L	56	57	74.5-92	2.4	54x18x80	2	6
GM136-914L	52	60	82-92	3.6	60x35x93	2	9.4
GM136-915L	56	60	74.5-92		58x18x81	2	7
GM136-917L(L)	57	42	87-97	1.4	95x68x35	10	16
GM136-917L(M)	57	42	77-87	1.2	85x68x35	10	14
GM136-917L(S)	57	41	67-77		75x68x35	10	12

**COMMODE CHAIR - WITHOUT WHEEL**



**GM136-810**



**GM136-898**

**MAIN PARAMETERS**

Item Code	Icon 1	Icon 2	Icon 3	Icon 4	Icon 5	Icon 6	N.WT(kg)	DIM	PCS CN	G.W (kg)
GM136-810	56	46	41-51	74-84	40	33	6	60x32x48	2	13.4
GM136-898	41	38	40	—	40	—	1.6	75x30x40	6	10.7

**Stick**



**GM137-925L**



**GM137-928L**



**GM137-938L**



**GM137-936L**



**GM137-927L**

**MAIN PARAMETERS**

MODEL Number	HEIGHT (cm)	N.W. (Kg)	DIM (Cm)	PCS CN	G.W. (Kg)
GM136-925L(L)	128-148	0.9	132x33x29	20	19
GM136-925L(M)	116-136	0.85	119x33x29	20	18
GM136-925L(S)	103-123	0.8	103x33x29	20	17
GM137-927L	82-92	0.3	64x29x16	20	7
GM137-928L	77.5-100	0.3	79x29x18	20	7
GM137-936L	120	0.3	35x20x26	40	13
GM137-938L	77.5-100	0.35	79x34x19	20	8

*Best service to all old and new clients!  
Best greeting to all patients in the world!*

GM137-929L



GM137-910L

GM137-930L

GM137-924



GM137-921

GM137-922



GM137-922

**MAIN PARAMETERS**

MODEL Number	HEIGHT (cm)	N.W. (Kg)	(Cm)	PCS CN	G.W. (Kg)
GM137-910L	89	0.3	94x28x15	20	7
GM136-921	72.5-95	0.9	79x34x43	10	10
GM136-922	72.5-95	0.9	60x28x47	10	10
GM136-924	65-87.5	0.8	79x34x43	10	9
GM137-929L	68.5-91	0.3	65x28x15	20	7
GM137-930L	68.5-91	0.3	65x28x15	20	7
GM136-932	80-102.5	0.9	60x28x47	10	10

**GM141 Tractor for neck ache**



GM141-101

GM141-102




GM141-110

**cervical collar**  
macromolecule foam materials, light.

Tractor for neck ache  
Designed for treating and preventing neck fractured is location of vertebra. Protrusion of the intervertebral disc and excessive stretch and draw. It can support the patient's head efficiently depending on appropriate air pressure, so that it can release the neck and shoulder burden. Also it has the magetic infrared treatment function to dispel the pain.



GM142-101

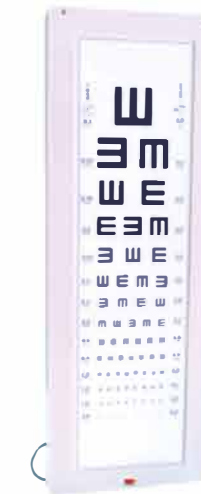

GM142-102

**GM142 Luxurious eyesight lamp box**

This is served as an apparatus for enghtsight examination in hospitals .  
In practical use, it boasts the advantages of soft and comfortable lighting levels and, being made of alluminum materials, it has a very handsome appearance.  
There are three styles available—desktop style, wall style and hanging style.  
Main Technical data:  
Power voltage: AC 220V ± 10%  
Frequency: 50Hz  
Power: 60w

GM140-102  
Infusion stand




**GM143-200**

**Operation reflector lamp** Stainless haulm, hose flexible lift type, unbending rise or drop.  
Voltage: AC 220V;  
frequency: 50Hz;  
power: 60W



*Best service to all old and new clients!  
Best greeting to all patients in the world!*

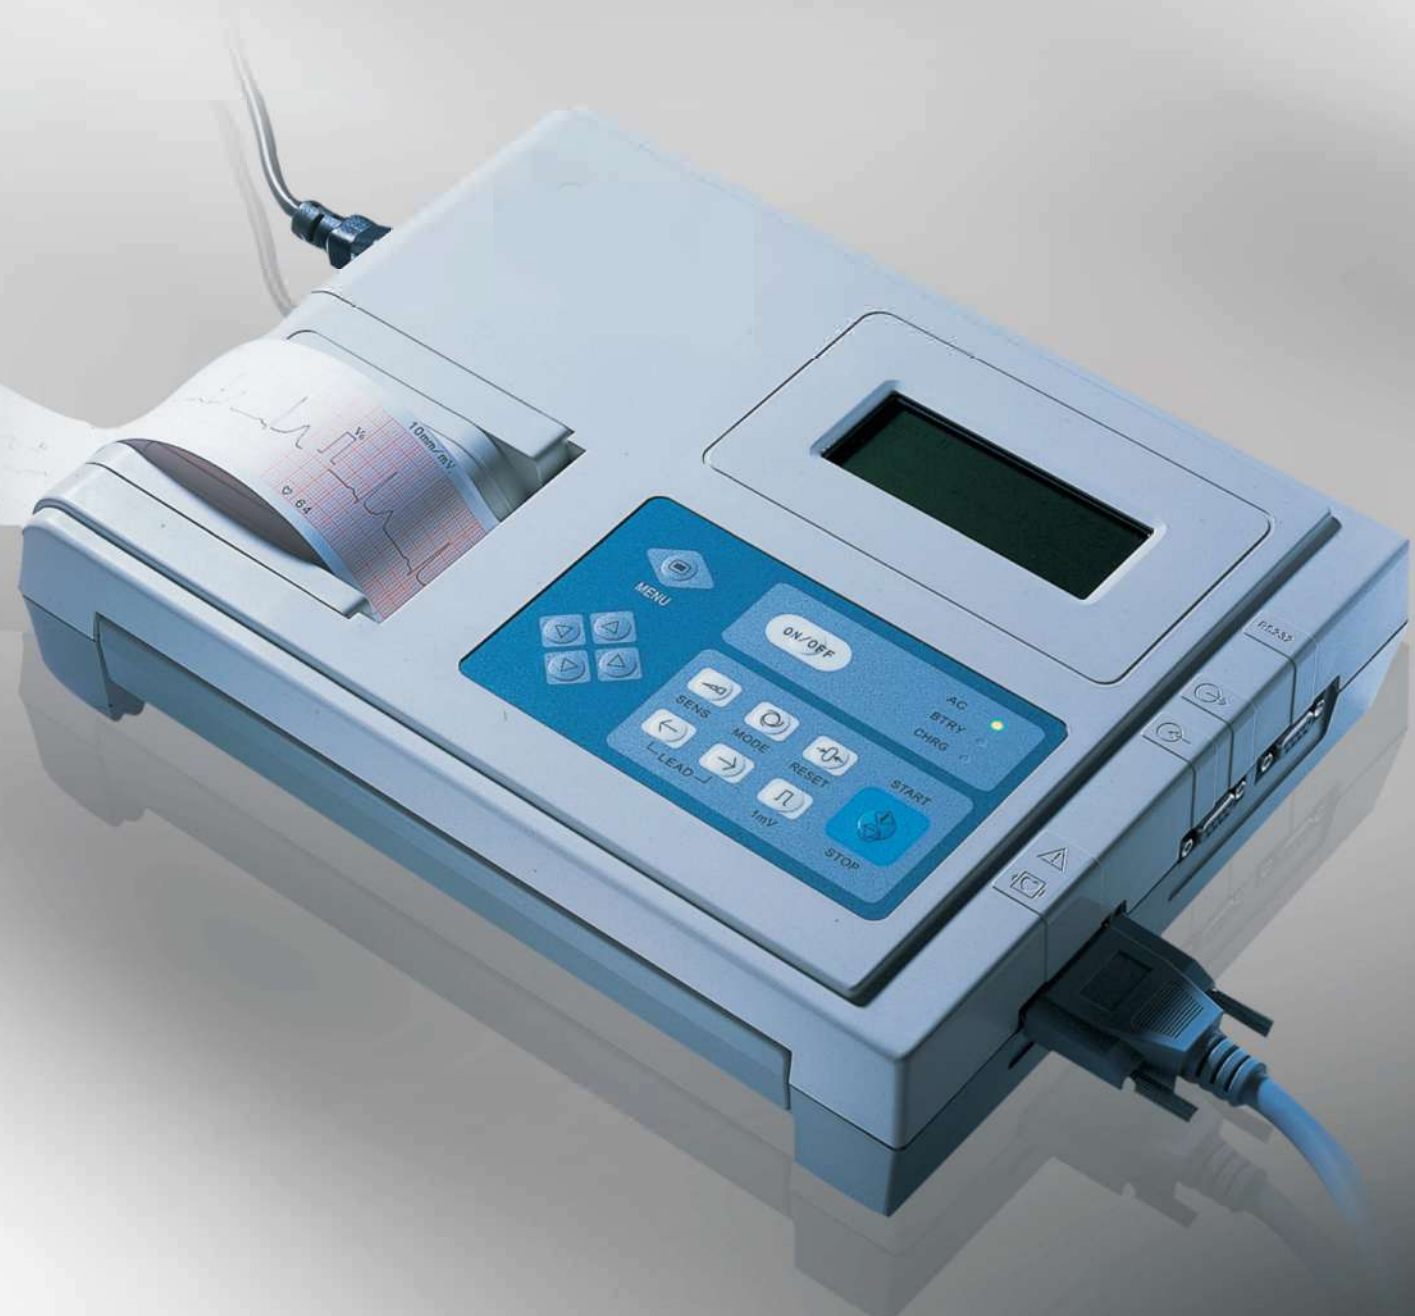

GM147-101

**GM147-101**  
**Single channel automatic electrocardiograph**

- High resolution thermal printer
- AC/Rechargeable battery
- Unique design of rhythm lead
- LCD Display
- A C,EMG and DFT Filter
- Waveform display

**GM147-201**  
**12 channel digital electrocardiograph**

- Features Literature Technical Gallery Main Features**
1. Design patent issued by the State Intellectual Property Office of China
  2. Reliable measurement and analysis result contributed by CSE database
  3. Software copyright patent of "real-time age-analysis" which ensures accurate analysis results issued by the State Intellectual Property Office of China
  4. 12.1"color TFT LCD display
  5. Simultaneous acquisition and display of 12 channel ECG waveforms
  6. Alphameric keyboard, one touch operation
  7. Complete digital filters of ADS, EMG, HUM and low-pass
  8. Freeze function: observe any abnormal ECG waveform
  9. Pre-10-second printing function: print out any abnormal ECG waveform
  10. Multi-format printouts
  11. Any lead can be rhythm lead
  12. Detection and alarm of lead-off and low battery capacity
  13. Automatic adjustment of baseline for optimal recording
  14. Built-in Help Function: electrode positioning, ECG basic knowledge, common trouble-shooting and so on
  15. Clinical information such as patient ID, name, gender, age, height, weight, blood pressure, hospital name can be input
  16. Maximum 2,000 ECG files can be saved. Saved ECG files can played back or printed out
  17. Flexible saving interface. Saved ECG files can be displayed in image-text or list format, easy for search
  18. Auto-save function: after printing, the printed ECG file will be automatically saved to flash or SD card
  19. Communicate with PC for ECG data management(option)



GM147-201

Functions of T12 are listed in below table.



GM147-106

**GM147-106**  
**Six channel interpretive electrocardiograph**

- High resolution thermal printer
- Anti drift filter
- Multiple print Format
- AC/Rechargeable battery
- Simultaneous 12 lad acquisition
- LCD Display
- ECG measurement/Interpretation
- Powerful AC & EMG Filter



ADD: 7122 S Sheridan Rd Ste 2 - 1012Tulsa, OK 74133-2748  
 TEL: 1-918-8091339  
 FAX: 1-918-523-7121  
 WEB: <http://www.glenmedicon.com>  
 E-mail: [info@glenmedicon.com](mailto:info@glenmedicon.com)

*Best service to all old and new clients!  
 Best greeting to all patients in the world!*

### GM147-602

#### Single channel digital electrocardiograph

- 12-lead simultaneous acquisition
- 3.8" LCD, real-time display of 12 channel ECG waveforms
- Detection and alarm on lead-off and low battery capacity
- Automatic adjustment of baseline for optimal printing Built-in ECG simulator for DEMO purpose
- 3 kinds of operation mode: AUTO, MAN and ANA
- 3 kinds of filter: HUM, EMG and ADS
- power supply: AC, DC and battery
- 2 types lead mode: Standard and Cabrera
- 15 ECG files can be save in the ECG
- 1,000 ECG files can be save to SD card ( Option )
- Communication with PC (Option)



GM147-602



GM147-603

### GM147-603

#### Fetal monitor

##### Main performance

**Security:**  
Anti-shock types: Facilities I, no internal power supply Anti-electric Shock Degree: B Working Voltage: AC 100 V~240 V  
Frequency: 50 Hz/60 Hz P<60 VA Fuse: T1.6AL250V Display Dimensions: 8.0 "color LCD display, folding 60 degree Display  
Content: bed No. , pregnancy weeks, age, paper speed, date, time , volume, alarm status, transducer connection status, recorder status, FHR data and wave, Contraction data and wave, Fetal move times and mark etc.

**Print:**  
Record Paper two-double type Z Print Width: 112 mm Valid Print Width: 104 mm Paper output speed: 1 cm/min、 2 cm/min、 3 cm/min(optional) Data Precision: ± 5 % ( X Roll ) , ± 1 % ( Y Roll ) Record Content: hospital , bed No. , name, pregnancy weeks, patient No. , paper speed, date, time , FHR data and wave, Contraction data and wave, Fetal move times and mark etc.

**Ultrasound probe:**  
Nominal Frequency: 1.0 MHz Work Frequency: 1.0 MHz ± 10 %  
Negative peak sound pressure :  $p_{-} < 1$  MPa Output beam intensity :  $lob < 20$  mW/cm<sup>2</sup>  
The peak time space peak intensity:  $Ispta < 100$  mW/cm<sup>2</sup> The average time space peak intensity:  $Isata < 10$  mW/cm<sup>2</sup>  
FHR Rang: 50 BPM~240 BPM Resolution: 1 BPM Accuracy : ± 2 BPM

**TOCO**  
TOCO range: 0~100 % Resolution: 1 %  
Nonlinear error: < ± 10 % RZ way: Manually  
Fetal Marking  
For the manual button (the operation of pregnant women), there will be a mark display in the bottom area of FHR wave display section.  
FHR Alarm: Alarm for high and low FHR, which exceeds appointed limit.



GM148-101  
ECG Paper

GM148-301  
Electrode code

GM148-201  
Ultrasound gel

### GM148-202

#### 5L barrel pliancy

- Technical Parameter
- 1)pH value: 5.5 ~ 8.0
  - 2)viscosity (25°C): ≥ 15 Pa.s
  - 3)velocity of sound: 1520 ~ 1620 m/s
  - 4)acoustic impedance:  $1.5 \times 10^6 \sim 1.7 \times 10^6$  Pa?s/m
  - 5)acoustic attenuation: ≤ 0.1 dB/(cm · MHz)



### GM147-50D+

#### Fingertip oximeter

Display Mode: 0.96" Dual-color OLED display(blue and yellow)  
Screen Resolution: 128\*64  
SpO2 Measuring Range: 0% ~ 100%, (the resolution is 1%).  
Accuracy: 70% ~ 100% ± 2% Below 70% unspecified  
PR Measuring Range: 30bpm ~ 250bpm, (the resolution is 1bpm)  
Accuracy: ± 2bpm or ± 2% (select larger)  
Measurement Performance in Weak Filling Condition: SpO2 and pulse rate can be shown correctly when pulse-filling ratio is 0.4%.  
SpO2 error is ± 4%, pulse rate error is ± 2 bpm or ± 2% (select larger).  
Resistance to surrounding light: The deviation between the value measured in the condition of man-made light or indoor natural light and that of darkroom is less than ± 1%  
Power Consumption: less than 30mA  
Voltage: DC 2.6V~3.6V  
Power Supply: 1.5V (AAA size) alkaline batteries × 2  
Battery working hour: Theoretical number is 32 hours.  
Safety Type: Interior Battery, BF Type

#### Sell in standard:

- A hanging rope
- A user manual
- A data line
- A disk (PC software)
- Sell in addition:  
RF wireless module
- Oximeter probe(Refer to probe application instruction for details and notice renewal)

#### Physical Identity

Dimension: 58.5(L) × 31(W) × 32 (H) mm  
Weight: About 52g (with the batteries)



### GM147-50DL

#### Fingertip oximeter

LED display  
SPO2: 35~99% pulse ratio: 30~250BPM  
Resolution: 1% for SPO2, 1BPM for pulse ratio  
Accuracy: ± 2% (70% ~ 99%), unspecified (<70%) for SPO2, ± 2BPM or ± 2% (select larger) for pulse ratio  
Power: 1.5V (AAA size) alkaline batteries × 2  
Can work more than 30hours continuously  
Interference resistance capacity against ambient light and measurement performance at low perfusion

#### Sell in standard:

- A hanging rope
- A user manual

#### Physical Identity

Dimension: 61(L) × 36(W) × 32(H) mm  
Weight: About 50g (with the batteries)

### GM147-60D

#### Handheld oximeter

SPO2:  
Measurement Range: 0 ~ 100%  
Resolution: 1%  
Accuracy: ± 2% (70%~100%, Adult/Pediatric, non-motion)  
± 3% (70%~100%, Neonate, non-motion)  
0% ~ 69% unspecified  
Alarm Range: 0% ~ 100%  
Refreshing Rate: 1s  
Pulse Rate:  
Measurement Range: 25 ~ 250 bpm  
Resolution: 1bpm  
Accuracy: ± 3 bpm (non-motion)  
Alarm Range: 25 ~ 250 bpm  
Refreshing Rate: 1s

#### Sell in standard:

- A user manual
- A data line
- A disk (PC software)
- An oximeter probe
- Sell in addition:  
Other oximeter probe(Refer to probe application instruction for details and notice renewal )

#### Physical Identity

Dimension: 110(L) × 60(W) × 23(H) mm  
Weight: About 180g (with Alkaline battery 2AA)



### GM147-901

#### Handhold ECG Monitor

##### Main Function

- Direct collection of ECG on chest, realtime refresh of display and memory
- Frozen and extended display during ECG collection and replay Character display of ECG parameter(HR, QRS, RH, P-R)
- Rhythm classification with Multi-Language and alarm in dangerous
- Display of heart beating peried histogram in order and random
- Storage and accese of typical ECG segments
- Output port can be connected to any ECG machine or micro-printer to get record

### GM147-902

#### Blood Glucose meter & test strips

1. Multifunction: including the pulse test (only XS-IV+ has this function)
2. Less Measuring Time: 5 seconds
3. More Memory capacitance: 60 results
4. Big screen

Best service to all old and new clients!  
Best greeting to all patients in the world!



### GM151-101

#### Electronic spirometer

Test range: Vc:0 ~ 9999mL  
Accuracy:  $\leq \pm 5\%$  ( F.S )  
Working environment: 5 ~ 40°C  
Relative humidity:  $\leq 80\%$ RH  
Power: 220V(or 2 AA battery)



### GM151-102

#### Electronic spirometer

vital capacity: Vc:0 ~ 10L  
accuracy: :  $\leq \pm 5\%$  ( F.S )  
tidal volume: 0.10 ~ 2.00L  
accuracy: :  $\leq \pm 5\%$  ( F.S )  
Max. voluntary ventilation/min :0 ~ 200L/min  
accuracy: :  $\leq \pm 5\%$  ( F.S )  
Working environment: 5 ~ 40°C  
relative humidity:  $\leq 80\%$ RH  
power:220v



### GM151-103

#### Electronic spirometer

vital capacity: Vc:0 ~ 10L  
accuracy: :  $\leq \pm 5\%$  ( F.S )  
tidal volume: 0.10 ~ 2.00L  
accuracy: :  $\leq \pm 5\%$  ( F.S )  
Max. voluntary ventilation/min :0 ~ 200L/min  
accuracy: :  $\leq \pm 5\%$  ( F.S )  
Working environment: 5 ~ 40°C  
relative humidity:  $\leq 80\%$ RH  
power:220v



### GM149-204

#### Compressor nebulizer

This equipment sprayed liquid medication to fog panel by compressing air, and form tiny particles, which flow into the throat through imbibing tube. It adopts oil-free-high-efficiency valve with no need for daily lubrication and it is with low noise, tiny particles. It is an ideal product for family and medical units' use.  
Principle technical date:  
Maximum compressor pressure:  $\geq 0.15$  Mpa  
Compressor free air flow:  $\geq 10$  L/MIN  
Maximum nebulization rate:  $\geq 0.2$  ML/MIN  
Power :< 150 VA

### GM149-205

#### Compressor nebulizer

This equipmentsprayed liquid medication to fog panel by compressing air, and form tiny particles, which flow into the throat through imbibing tube. It adopts oil-free-high-efficiency valve with no need for daily lubrication and it is with low noise, tiny particles. It is an ideal product for family and medical units' use  
Powerful piston pump is efficient, dependable and quiet.  
Comes complete with ampule for nebulizing, mouth piece, tubing and user manual.

#### Principle technical date:

New, lightweight portable design:  $\leq 2.0$  KG  
Electric requirements: AC220 $\pm$ 22V 50Hz $\pm$ 1Hz  
Maximum compressor pressure:  $\geq 0.15$  Mpa  
Compressor free air flow:  $\geq 10$  L/MIN  
Maximum nebulization rate:  $\geq 0.2$  ML/MIN  
Sound level:  $\leq 65$  dB (A)  
Power :< 150 VA



### GM149-206

#### Nebulizer series

Atomizer adopts all-transistor circuitry,passes through eletron coupling oscillating circuit it,produces ultrasonic. The ultrasonic makes water soluble medicine become ting partices by aquecles medium. It reaches user's mouth by mouth piece and mask.

#### Features: various uses,more suitable for home use

- 1、 This product is suitable for the surroundings,which need faint scent or disinfectant,or increasing humidity.
- 2、 Facial cleaning & beauty care: Applying over 1MHz ultrasonic nebulized mist to clean the face is very effective,and it is a usual skin care method, very convenient and comfortable.
- 3、 Jewelry cleaning: Immerse the jewelry in the detergent and then turn on the machine.The grease and dirt can be removed from the jewelry after 10 minutes.

#### Principal technical data:

Voltage: AC220V 50Hz  
Power: 45VA  
Ultrasonic frequency: 1.7MHz  $\pm$  10%  
Max nebulizing rate:  $\geq 3$ ml/min  
Timing range: 0 ~ 60min no adjustable range  
Continuous load time:  $\geq 4$ h  
Madication cup capacity:  $\geq 150$ ml





**GM149-101**

**Ultrasonic nebulizer**

Max capacity of medicine cup: 50ml;  
Capacity of water trough: 250ml  
Nebulizing amount: 3ml/min-5ml/min



**GM149-201**

**Compressor nebulizer**

Max capacity of medicine cup: 10ml  
Nebulizer rate: 0.4ml/min  
Particle size rate: 5.2 μm (MMD\*)  
Residual of a medicine: ≤0.5 ml  
Noise: 56dB(A)



**GM146-101**

**Characteristics:**

1. Fully stainless steel structure.
2. Double scale indication pressure gauge.
3. Electric heated.
4. Easy to operate, safe and reliable



**GM146-102**

**Vertical pressure steam sterilizer**

**Characteristics:**

1. Fully stainless steel structure
2. Hand wheel type of quick-open door structure
3. Door safety lock system
4. Automatically controlled by computer
5. Digital display of working status, touch of key
6. Over temperature & over pressure auto-protection
7. Steam-water inner circulation system: no steam discharge, and the environment for sterilizing will be clean and dry
8. Self-inflating type seal
9. Safe protection of water lacking
10. The drying system is optional, which can be equipped according to the customers' request
11. Automatically shut off with beep reminding after sterilization
12. With two stainless steel sterilizing baskets



**GM149-202**

**Compressor nebulizer**

Max capacity of medicine cup: 5ml  
Nebulizer rate: 0.2ml/min  
Particle size rate: 2.5 μm (MMD\*)  
Residual of a medicine: ≤0.5 ml  
Noise: 50dB(A)



**GM150-300**

**Urine Analyzer**

**Main technical:**

Testing items: GLU, BIL, SG, KET, BLD, PRO, URO, NIT, LEU, VC, PH value  
Testing wavelength: 550nm, 620nm, 720nm  
Testing speed: 144 pieces/hour  
Data storage: storage of no less than 3000 sample data, free query in term of testing data and sample number  
Reaction time: 25-30 seconds  
Printer: built-in high-speed, temperature sense printer  
Power supply: 220V ± 22V 50Hz ± 1Hz



**GM146-103**

**Vertical pressure steam sterilizer**

**Characteristics:**

1. Fully stainless steel structure
2. Hand wheel type of quick-open door structure
3. Door safety lock system
4. Automatically controlled by computer
5. Digital display of working status, touch of key
6. Over temperature & over pressure auto-protection
7. Steam-water inner circulation system: no steam discharge, and the environment for sterilizing will be clean and dry
8. Self-inflating type seal
9. Safe protection of water lacking
10. The drying system is optional, which can be equipped according to the customers' request
11. Automatically shut off with beep reminding after sterilization
12. With two stainless steel sterilizing baskets



**GM146-104**

**Horizontal Cylindrical Pressure Steam Sterilizer**

**Characteristics:**

1. Sterilizing course automatic sterilization controlled, easy to operate.
2. With drying function, suitable dressing drying.
3. With over-temperature, over-pressure auto-protect device.
4. The door opening mechanism cannot be operated until the pressure in the chamber is reduced to 0.027MPa. It can't be start on if the door doesn't close well.
5. The safety valve will be open automatically when the inner pressure over 0.24MPa, and the steam be exhausting to the water tank.
6. The power will be cut-off automatically, cut-off the water and alarm when the machine lacking water.
7. The chamber of the sterilizer is made of stainless steel.

*Best service to all old and new clients!  
Best greeting to all patients in the world!*





**GM151-104**  
Oxygen absorber

**GM151-107**  
Oxygen absorber

**GM151-108**  
Oxygen absorber

**GM151-109**  
Oxygen absorber

Model	Service Medium	Max. discharge pressure	Max. discharge pressure	Nominal Flow Rate	Precision class	Inlet Connection	Outer Connection
GM151-104	Oxygen	200Kg/cm <sup>2</sup>	0.2-0.3 Mpa	1-10L/min	4 Class	CGA540	M10X1-RH(M)
GM151-107	Oxygen	150Kg/cm <sup>2</sup>	0.2-0.3 Mpa	1-15L/min	4 Class	G5/8"-RH(F)/CGA540	M10X1-RH(M)
GM151-108	Oxygen	150Kg/cm <sup>2</sup>	0.2-0.3 Mpa	1-15L/min	4 Class	G5/8"-RH(F)/CGA540	9/16-18RH(M)
GM151-109	Oxygen	200Kg/cm <sup>2</sup>	0.2-0.3 Mpa	1-10L/min	4 Class	G5/8"-RH(F)/	M10X1-RH(M)

**GM620-111 GM620-108**  
**Electric Suction Apparatus**

Power Technical :AC 220V ± 10% 50Hz  
 Pump voltage: rotary vance type  
 Efficiency of negative pressure: /30L/min  
 Negative pressure value: ≤-0.091MPa  
 Range of negative pressure:-0.013MPa to -0.091MPa  
 Input power: 600VA  
 Suction vessel:2500ml 32  
 Noise level: ≤55dB



**GM620-111**



**GM620-108**

**GM133-100**

**Oxygen Concentrator**

**ACCESSORIES LIST**

- Nasal oxygen cannula: 1 set
- Filter core: 1 set
- Power cord: 1 piece
- Fuse tube: each 2 pieces
- Manual 1 piece.

All specifications and product configurations are subject to change without notification.

Altitude: Up to 1828 meters above sea level without degradation of concentration levels.

From 1828 meters to 4000meters below 90% efficiency.

6. Sound Level: ≤55dB(A)

7. Power Supply:

- AC120V ± 10%  AC220V ± 10%  AC230V ± 10%
- 50Hz  60Hz 4.0 amps

8. Input Power: ≤350VA

9. Weight: 26.5kg

10. Dimension: 47 × 28.5 × 55.6(cm3)

11. Minimum Operating Time: 30minutes

Electric classification: II class B type.

Work system: work continuously.

Keep it far from flammable and explosive gas area.



**GM149-207**



**GM149-208**

**GM149-207**

**Oxygen bag (Nylon texture with oxygen tube)**

Major specifications: 30L □ 42L □ 50L

It is made of non-poisonous nylon with rubber materials applied on single face which has no adverse chemical effects, mainly used for emergency use in hospital and as health care product at home. Clean, safe, durable and easy to carry.

**GM149-208**

**Oxygen cylinder**

Apply a trolley with cylinder basket and straps, easy for users to take out and put in.



**GM620-101**



**GM620-102**

**GM150-101 GM150-102**

**Handheld Electrical Suction Apparatus**

Power voltage:AC 220V ± 10% 50Hz  
 Pump structure:oil-free,self-lubricated pump  
 Air pumping efficiency:15L/min  
 Negative pressure value: ≤-0.08MPa  
 Range of negative pressure:-0.02MPa to -0.08MPa  
 Input power: 120VA  
 Suction vessel:1000ml  
 Noise level: ≤55dB

*Best service to all old and new clients!  
 Best greeting to all patients in the world!*

**Urine Container**



**GM138-106** PP material, size: 32 x 23.8 x 8.5cm, 110g



**GM138-107** PE material, 1000cc, size: 32 x 21 x 10.5cm, 60g



**GM138-108** PP material, size: 36.5 x 28 x 10.6cm, 180g



**GM138-109** PE material, size: 34 x 26.5 x 9cm, 300g



**GM138-117**



**GM138-118**



**GM138-119**



**GM38-120**



**GM138-110** PP material, size: 34oz, 230g



**GM138-111** PP material, size: Up-dia: 12.2cm, Bottom-dia: 9.3cm, H: 16.3, 63g



**GM138-112** PE material, size: Up-dia: 11.5cm, Bottom-dia: 8, H: 13.6cm, capacity: 800ml, 13g



**GM138-113** PP material, size: 51 x 28 x 9cm, 500g



**GM138-121**



**GM138-122**



**GM138-123**



**GM138-124**



**GM138-101**



**GM138-102**



**GM138-103**



**GM138-114** News paper, size: 25.5 x 11.5 x 11cm



**GM138-115** News paper, size: 25 x 11 x 10.8cm



**GM138-116** PP material, size: 25 x 10 x 4.9cm, 25g



**GM138-104**



**GM138-105**



**GM139-100**

*Best service to all old and new clients!  
Best greeting to all patients in the world!*

**Our Brand Package**



**GM001-101**  
Aneroid Sphygmomanometer



**GM001-110**  
Aneroid Sphygmomanometer With Separate Single Head Stethoscope



**GM001-120**  
Palm Type Aneroid Sphygmomanometer



**GM001-121**  
Palm Type Aneroid Sphygmomanometer



**GM151-104**  
Oxygen absorber



**GM132-101**  
Bathroom scale



**GM132-103**  
Bathroom scale



**GM130-100** Electronic Infant Scale Max. Weighing: 20kg



**GM001-126**  
Palm Type Aneroid Sphygmomanometer



**GM001-140**  
Aneroid Sphygmomanometer



**GM001-200**  
Professional Mercury Sphygmomanometer Desk type



**GM002-100~160** Single head stethoscope



**GM002-200~160** Dual head stethoscope



**GM002-270~290** Stainless Steel Stethoscope



**GM002-300~320** Sprague Rappaport Stethoscope



**GM002-400** Fetal Stethoscope



**GM004-130** Oral Use Clinical Thermometer



**GM004-100~120** Armpit Use Clinical Thermometer



**GM004-204** Digital Thermometers



**GM004-240** Baby use Digital Thermometer



**GM004-250** Infrared Ear Thermometer



**GM006-100** Pen Light

*Best service to all old and new clients!  
Best greeting to all patients in the world!*